



- **Elektromotor 230V AC - 370W**
Electric motor 230V AC - 370W
- **Drehgelenk mit hohem Mediendurchsatz**
Swivel with high flow rate
- **Stahl lackiert gemäß UNI 9227**
Painting complies UNI 9227
- **Montagehalter fix**
Fixed mounting bracket

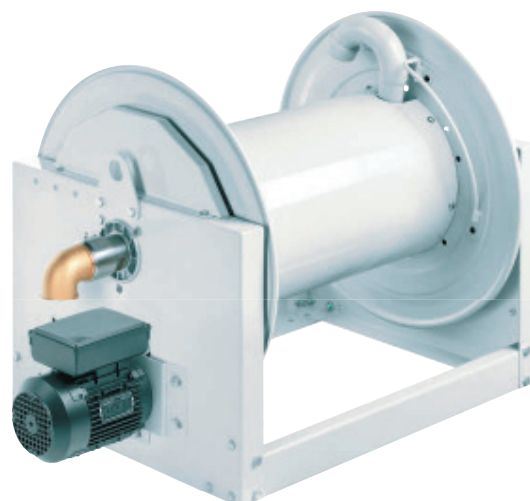

Innen/ Inside Ø	Außen/ Outside Ø	Kapazität Aufroller bei Trommelbreite/ Capacity Hose reel at a drum width			
		270mm	410mm	550mm	690mm
3/8"	17mm	200m	300m	410m	530m
1/2"	20mm	150m	220m	310m	410m
3/4"	27mm	80m	140m	200m	250m
1"	35mm	50m	80m	110m	140m
1 1/4"	43mm	35m	50m	65m	85m
1 1/2"	50mm	20m	45m	65m	80m
2"	63mm	13m	25m	35m	45m
Drehgelenk 2"IG/ Swivel 2"F		Artikel Nr. Article no.	Artikel Nr. Article no.	Artikel Nr. Article no.	Artikel Nr. Article no.
Aluminium/ Aluminium, max. 20bar		6.310.130.270	6.310.130.410	6.310.130.550	6.310.130.690
Stahl/ Steel, max. 70bar		6.310.230.270	6.310.230.410	6.310.230.550	6.310.230.690

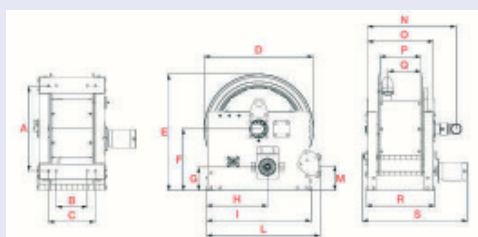

Schlauchaufroller auch lieferbar komplett bestückt mit Schlauch für:
Kalt- und Heißwasser, Diesel, Öl, Druckluft, Vakuumanwendungen, Schmutzwasser uvm.

Hose reel can be also delivered including hoses suitable for:
Cold- and Hot water, Diesel, Vacuum applications, Oil, Air, Waste water and many more.

Maße mm Sizes mm	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S
Breite - Gewicht Width - Weight																	
270mm 102kg	542	200	300	700	760	410	150	390	670	730	160	570	422	260	210	435	680
410mm 113kg	542	340	440	700	760	410	150	390	670	730	160	712	562	398	350	575	844
550mm 120kg	542	480	580	700	760	410	150	390	670	730	160	850	705	538	490	717	965
690mm 136kg	542	620	720	700	760	410	150	390	670	730	160	990	842	680	630	855	1100